




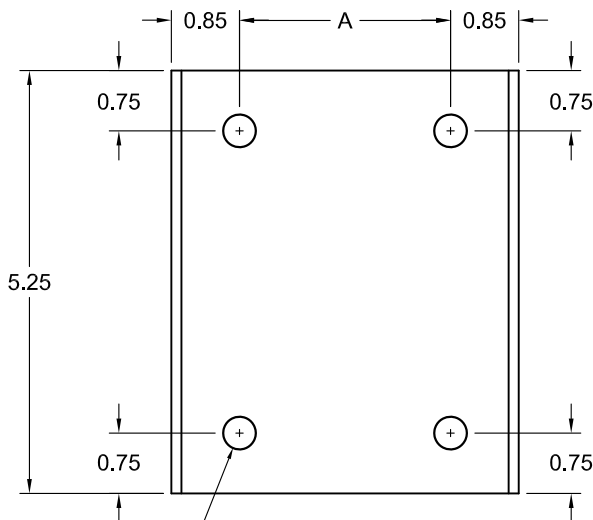

NO.	REVISION	BY	DATE	MATERIAL I.D.
0	APPROVED	TM	04-16-15	SPW
1	ADDED U.L CERTIFICATION FOR CSA (CANADA) COMPLIANCE	TM	08-28-15	

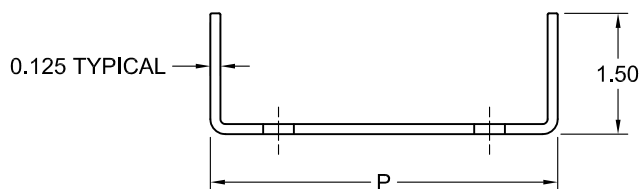

0.469 DIA HOLE
TYPICAL 4 PLACES

±	CATALOG NUMBER	CHANNEL WIDTH		PLATE DIMENSIONS		PLATE QTY.
		W*	ACTUAL	P	A	
	SPW-AC3-(F*)4	3	3.00"	3.31"	1.62"	1
	SPW-AC4-(F*)4	4	4.00"	4.31"	2.62"	1
	SPW-AC6-(F*)4	6	6.00"	6.31"	4.62"	1

NOTES:

1. COMPLETE ASSEMBLY CONSISTS OF ONE PLATE WITH FASTENERS INDICATED.
2. THESE ARE THE STANDARD SPLICE PLATE CONNECTORS FOR USE WITH ALL STANDARD CABLE CHANNEL SYSTEMS.
3. INSTALL IN ACCORDANCE WITH NEMA STANDARD VE-2 CABLE TRAY INSTALLATION GUIDELINES.
4. NECESSARY STRAIGHT SPLICE PLATES WITH FASTENERS ARE AUTOMATICALLY SUPPLIED WITH ALL CABLE CHANNEL STRAIGHT SECTIONS AND FITTINGS AT NO EXTRA CHARGE. EXTRAS FOR FIELD CUTS OR SPARES SHOULD BE ORDERED SEPARATELY.

±	F*	FASTENER MATERIAL	INCLUDED FASTENERS	FASTENER CATALOG NO.	QTY.
	G	GEOMET-PLATED STEEL	3/8" x 3/4" RIBBED-NECK SCREW	F-RNS-38-34-G	4
			3/8" FLANGED HEX NUT	F-FHN-38-G	4
	S	TYPE 316 STAINLESS STEEL	3/8" x 3/4" RIBBED-NECK SCREW	F-RNS-38-34-S	4
			3/8" FLANGED HEX NUT	F-FHN-38-S	4

± MARK "√" IN BOX TO INCLUDE IN SUBMITTAL



CABLE CHANNELS EMPLOYING THESE CONNECTORS ARE CLASSIFIED BY UNDERWRITERS LABORATORIES TO BE SUITABLE FOR USE AS EQUIPMENT GROUNDING CONDUCTORS. BONDING JUMPERS ARE NOT REQUIRED TO MAINTAIN GROUND PATH INTEGRITY. RESISTANCE ACROSS COUPLING IS LESS THAN 0.00033 OHMS. CERTIFIED BY U.L. TO MEET NEC. 392 AND NEMA STD. VE1, CSA-C22.2 NO. 126.1.

MATERIAL: 1/8" THICK ALUMINUM ALLOY 5052-H32

NOTE: ALL DIMENSIONS ARE SUBJECT TO THE MANUFACTURING TOLERANCE SPECIFICATIONS IN DOCUMENT USP-QA-05-02.

ATKORE

560 WHARTON CIRCLE, SUITE E ATLANTA, GA 30336 USA
PHONE: 404-696-8585 FAX: 404-696-8599

SHEET NO.
1 OF 1
DIMENSIONS
INCHES

DESCRIPTION
SPLICE PLATES FOR CHANNEL, WRAP-AROUND TYPE, ALUMINUM

CATALOG NUMBER
SPW-AC(W*)-(F*)4

CATALOG NUMBER VARIABLES
W* = CHANNEL WIDTH (3, 4, 6)
F* = FASTENER MATERIAL (G OR S)