




NO.	REVISION	BY	DATE	MATERIAL I.D.
0	APPROVED	TM	09-25-17	CCEF
1	CHANGED BOTTOM CLAMP TO STANDARD FSC DESIGN	TM	01-30-18	

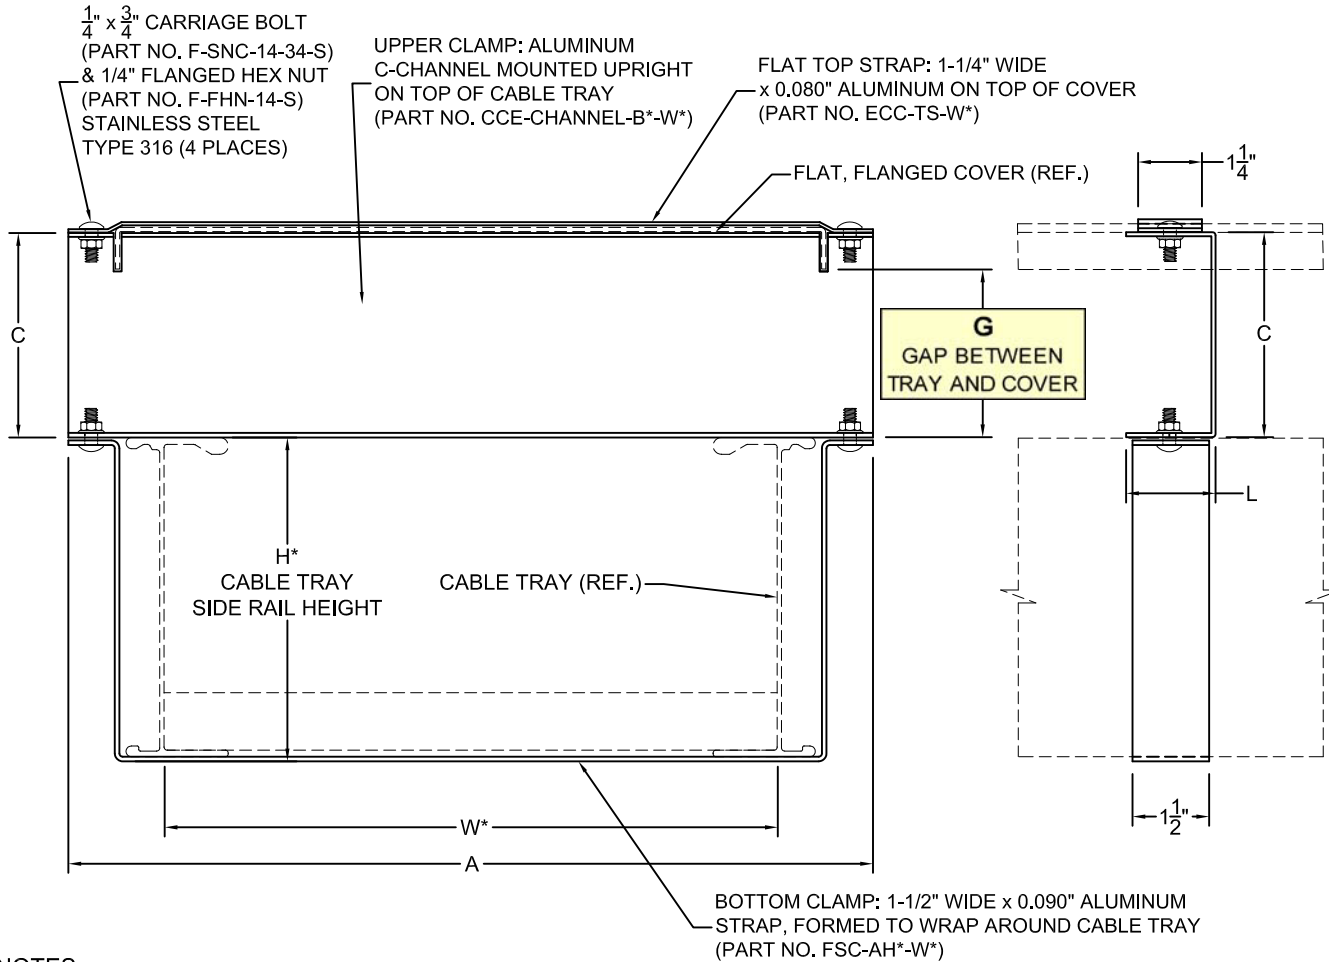

‡	TRAY SIDE RAIL HEIGHT		CATALOG NUMBER
	H* (NOMINAL)	ACTUAL	
	4	4.25"	CCEF-(B*)-A4-(W*)-S
	5	5.25"	CCEF-(B*)-A5-(W*)-S
	6	6.25"	CCEF-(B*)-A6-(W*)-S
	7	7.25"	CCEF-(B*)-A7-(W*)-S
	8	8.25"	CCEF-(B*)-A8-(W*)-S

‡	CHANNEL HEIGHT		L	‡	NOMINAL TRAY WIDTH (W*)		A
	B*	C					
	1	2.00"	1.50"	06	6"	9-3/4"	
	2	3.00"	1.75"	09	9"	12-3/4"	
	3	4.00"	1.75"	12	12"	15-3/4"	
				18	18"	21-3/4"	
				24	24"	27-3/4"	
				30	30"	33-3/4"	
				36	36"	39-3/4"	

‡	COVER THICKNESS	COVER FLANGES	G (GAP)		
			B* = 1	B* = 2	B* = 3
	0.040"	0.38"	1.63"	2.63"	3.63"
	0.063"	0.38"	1.63"	2.63"	3.63"
	0.080"	0.75"	1.25"	2.25"	3.25"
	0.090"	0.75"	1.25"	2.25"	3.25"
	0.125"	0.75"	1.25"	2.25"	3.25"
	0.190"	1.00"	1.00"	2.00"	3.00"
	0.250"	1.13"	N/A	1.88"	2.88"

NOTES:

1. COMPLETE ASSEMBLY CONSISTS OF (1) FLAT TOP STRAP, (1) UPPER CLAMP CHANNEL, (1) BOTTOM CLAMP, (4) 1/4 x 3/4 CARRIAGE BOLTS, AND (4) 1/4 FLANGED HEX NUTS.
2. DESIGNED FOR USE WITH FLAT, FLANGED COVERS ONLY.
3. THIS ITEM IS SUITABLE FOR USE OUTDOORS AND IN LOCATIONS WITH EXTREMELY HIGH WINDS.
3. INSTALL ON 36" TO 48" CENTERS ON STRAIGHT TRAYS. ON FITTINGS, INSTALL AT LEAST ONE ON EACH END OF THE FITTING.

MATERIAL: ALUMINUM ALLOYS 6063-T6 AND 5052-H32
FINISH:
HEAT TREAT:
CORE HARDNESS:
NOTE: ALL DIMENSIONS ARE SUBJECT TO THE MANUFACTURING TOLERANCE SPECIFICATIONS IN DOCUMENT USP-QA-05-02.

ATKORE		CATALOG NUMBER VARIABLES	
560 WHARTON CIRCLE, SUITE E ATLANTA, GA 30336 USA		PHONE: 404-696-8585 FAX: 404-696-8599	
DESCRIPTION RAISED COVER CONNECTOR ASSEMBLY FOR FLAT, FLANGED COVERS			SHEET NO. 1 OF 1
DRAWING NUMBER CCEF-(B*)-A(H*)-(W*)-S			DIMENSIONS INCHES